

## HIGH PRECISION METAL FILM RESISTORS

精密金屬膜電阻器

COATED TYPE

塗裝型

### QUICK REFERENCE DATA

技術參數

Type	RJ72	RJ73	RJ74	RJ16	RJ17	RJ18	型號		
Standard	GB5729-2003;SJ/T10571/10572/10573/10574-1994						執行標準		
Resistance range	0.1 Ω to 22M Ω						阻值範圍		
Resistance tolerance	B(±0.10%); C(±0.25%); D(±0.5%); F(±1%); J(±5.0%)						精度		
Stability	0.50%						穩定度等級		
Temperature coefficient	C7(±5ppm/°C); C6(±10ppm/°C); C5(±15ppm/°C); C3(±25ppm/°C); C2(±50ppm/°C)						溫度系數		
Rated dissipation, $P_{70}$	0.16W	0.25W	0.50W	1.0W	2.0W	3.0W	70°C以下額定功率		
Max. operating voltage $U_{max}$	200V	250V	300V	350V	450V	500V	$U_{max}$	最大工作電壓	
Max. short time over load voltage	400V	500V	600V	700V	900V	1000V	最大短時間過載電壓		
Operating temperature range	-55°C to 125°C						工作溫度範圍		
Insulation voltage	>500V						絕緣耐壓		
Insulation resistance	>1G Ω						絕緣阻抗		
Dimension	Max. (mm)	L=3.8, D=2.0	L=6, D=2.5	L=10, D=3.5	L=12, D=4.5	L=16, D=5.5	L=26, D=8.6	Max. (mm)	尺寸
	±0.05(mm)	d=0.50	d=0.60	d=0.60	d=0.7	d=0.8	d=0.8	±0.05(mm)	

## PRECISION METAL FILM RESISTORS

精密金屬膜電阻


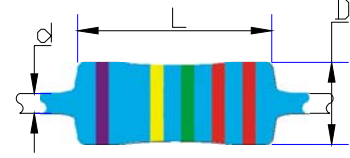

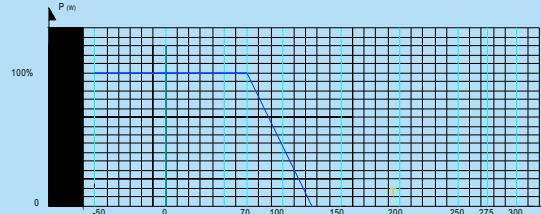
SMALL SIZE AND TINY SIZE

小型化和超小型化

### QUICK REFERENCE DATA

技術參數

Type	RJ73S	RJ74M	RJ74S	RJ16M	RJ16S	RJ17M	RJ17S	RJ18M	RJ18S	型號		
Resistance range	10 Ω to 10M Ω									阻值範圍		
Resistance tolerance	B(±0.10%); C(±0.25%); D(±0.5%); F(±1.0%); J(±5.0%)									精度		
Stability class	0.50%									穩定度等級		
Temperature coefficient	C3(±25ppm/°C); C2(±50ppm/°C); C1(±100ppm/°C);									溫度系數		
Rated dissipation, $P_{70}$	0.25W	0.5W	0.6W	1.0W	1.0W	2.0W	2.0W	3.0W	3.0W	70°C以下額定功率		
Max. operating voltage $U_{max}$	250V	300V	300V	350V	350V	400V	450V	450V	500V	$U_{max}$ 最大工作電壓		
Max. short time overload voltage	500V	600V	600V	700V	700V	800V	800V	900V	1000V	最大短時間過載電壓		
Operating Temperature range	-55°C to 125°C									工作溫度範圍		
Insulation voltage	>500V									絕緣耐壓		
Insulation resistance	>1G Ω									絕緣阻抗		
Dimension	max (mm)	L=3.8, D=2.0	L=3.8, D=2.0	L=6, D=2.5	L=6.3, D=2.5	L=10, D=3.5	L=10, D=3.5	L=12, D=4.5	L=12, D=4.5	L=16, D=5.5	max (mm)	尺寸
	±0.05(mm)	d=0.5	d=0.5	d=0.6	d=0.6	d=0.6	d=0.6	d=0.8	d=0.8	d=0.8	±0.05(mm)	

Outlines 		外觀 
Derating curve		降功率曲綫